




Table of contents

Choosing Your Floor	3
Why Cork	4
Acrodur	5
Series 200 WRT	6
Series 1000 HPS	12
Series 2000 HPS	18
International Product Selector	24
Recommended Applications	28
Cork flooring LEED credits	29
Specifications page	30
Warranty and maintenance	31

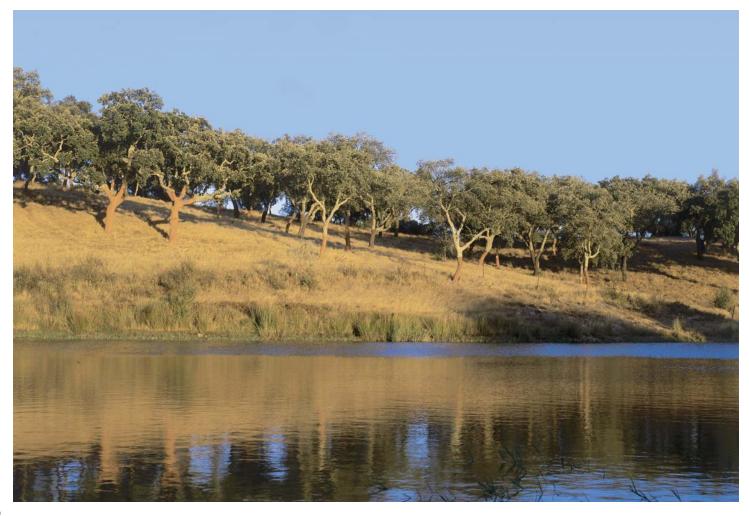

CHOOSING YOUR FLOOR



WicCork

A palette of ideas inspired by nature, combining textures and surprising colors. The originality of each pattern gives any surface a personal and distinctive touch.

Whether you choose a floating floor or a glue-down, we can help determine which Wicanders floor is most suitable for your project.

Xtreme WRT:

Ceramic is, after natural diamonds, the hardest known substance in the world. Our flooring coated with Xtreme WRT finish with ceramic micro-bead technology, is a perfect choice if you are looking for a matte, unique and durable finish with low maintenance. We want you to feel assured that you are making a good, long-term investment when you choose Xtreme WRT flooring from Wicanders. Even with its hard and resistant features, Xtreme WRT gives the floor soft and natural qualities and not the usual slippery and cold aspect provided by ordinary finishes.

HPS - High Performance Surface:

The high traffic on commercial floors puts much demand on the floor and the finish. Wicanders commercial quality floors are produced with hard wearing surface lying between the veneer and the HPS topcoat, which makes it extremely wear resistant. HPS finish is based on nano beads technology.

Extremely tiny beads are embedded in the top layer giving the whole surface improved properties such as scratch, slip, scuff and stain resistance, without compromising the natural appearance, elasticity and beauty of our cork floor. If you are in search of flooring for high traffic areas with an extremely durable, low-sheen finish, Wicanders Cork Flooring with HPS is the choice for you. With a 15-year commercial warranty, we are confident you will love the look and feel of Wicanders cork floors.

Glue-down versus Floating:

Floating:

Wicanders Cork Oak floating floor planks are engineered with the patented CorkLoc® system on all four sides. Each edge is comprised of durable compressed cork fiberboard and Cork Protect®, a natural paraffin-based all-around edge sealing system. This tightly pressed seal seamlessly vacuum locks against any and all moisture and debris, setting Wicanders CorkLoc® system apart from other floating floors

Glue-down:

If your project calls for glue down tiles because of the area of application or the size of the job, Wicanders Series 200 and Series 2000 are the ideal products for you.



WHY CORK



ENVIRONMENTALLY FRIENDLY

Cork keeps trees alive! WICANDERS floors are made with natural products and in the case of cork, an outstandingly ecological material, thus providing an environmentally friendly flooring solution. Mindful of today's need for conservation, WICANDERS floors are a true environmental alternative.



FAST & EASY INSTALLATION

Whether you choose the floating or glue-down option, WICANDERS floors are quicker and easier to install than ever before. With the improved CORKLOC-design and increased sizes of the glue-down range, a WICANDERS floor saves time and reduces installation expense.

SILENCE

The cork inner structure in all WICANDERS floors is guaranteed to cut noise. The cork reduces sound transmission between and within rooms, creating a quieter, and therefore peaceful, environment in your home.



COMFORT

The unique characteristics of cork also ensure that a WICANDERS floor is more comfortable to walk and stand on. Cork's shockabsorbing properties relieve strain on your feet, joints, legs and back.





WARMTH

The unique qualities of cork offer benefits other floors can't match. The natural thermal insulation properties make WICANDERS floors very pleasant to the touch, even with bare feet as they provide an optimal floor temperature all year round.



HEALTH

WICANDERS floors come with surface finishes that put a stop to entrapped dirt, germs or fungus, thus actively contributing to a healthy and hygienic environment.



The specialised surface finishes of WICANDERS floors make them easier for you to clean and maintain. A vacuum cleaner and a mop are all that is required to keep WICANDERS floors looking as good as new.



DURABILITY

With their unique cork structure and tough resilient surface finishes, WICANDERS floors are as durable as you'll ever need them to be. A WICANDERS floor withstands years of wear and still looks as good as the day it was first laid







experience . experience

A perfect combination between nature and technology

- > Advanced Binding Technology by BASF
- > Water Based all Acrylic
- > Formaldehyde free
- > Phenol free
- > Isocyanate free

Never forgetting our nature

Respecting what nature has given us


- > Balance Economy and Ecology
- > Renewable Sustainable Material
- > Superior Eco-Efficiency
- > Energy Saving
- > Excellent Natural Comfort



WICANDERS flooring now with Acrodur®





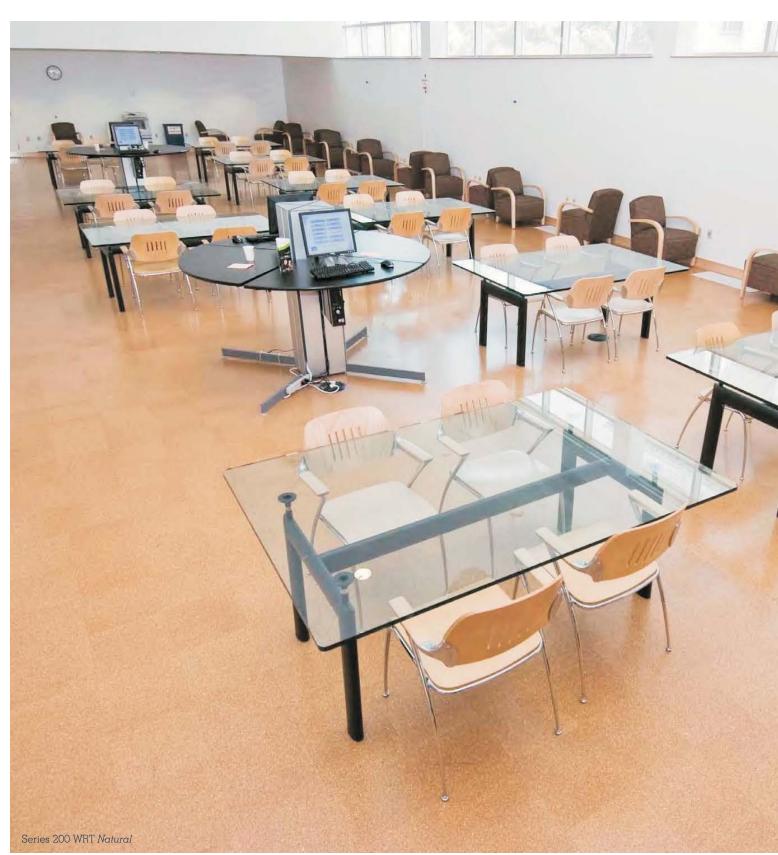

Xtreme WRT, which is based on a ceramic compound, is available as a glue-down floor. Microscopic analysis reveals the microstructure of tiny ceramic micro beads, which protect the floor for a long period of time against abrasion and scratches.



FEATURES:

Xtreme WRT Finish:

A 4 mm solid cork tile that insulates, absorbs sound, feels warm to the touch, and is extraordinarily soft to relieve strain on feet, joints, legs and back

Installation system:

Glue down

Dimensions:

nominal: $24 \times 12 \times 5/32$ " (600 x 300 x 4mm)

Warranty:

5 Year Light Commercial

Suitable for:

Courthouses, Churches, Classrooms, Dormitories, Conference rooms


Approximate installed cost:

\$5.00 - \$8.00 per square foot

LEED qualifying points:

MR Credit 4.1 & 4.2 (100% recycled content) MR Credit 6 IEQ Credit 4.1 ID Credit 1

Note: Series 200 WRT comes with a factory applied finish and does not need to be finished on site.

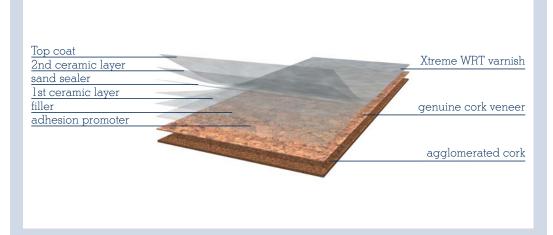

ORIGINALS COLLECTION



There is nothing more original than nature. Surprising creations to develop spaces with harmony, elegance and simplicity.



Natural RV10003



Harmony RV11007




Character RV16004



Dark RV05003



Natural Medium V973001

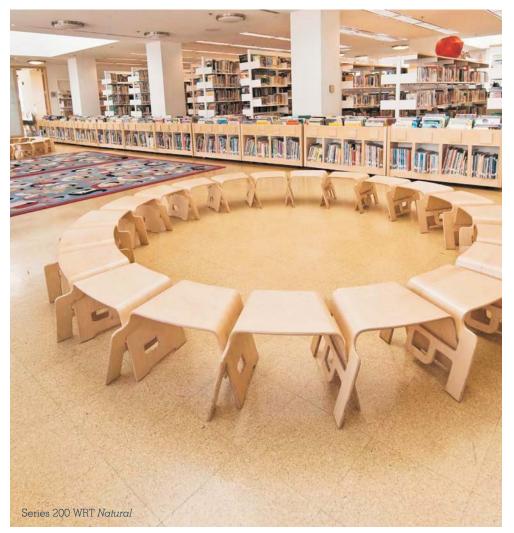

PERSONALITY COLLECTION



Each personality has its own shade. Available in a wide range of colors, this collection offers soft and subtle textures.



champagne

P905007



spice

P908006



NUANCES COLLECTION



Wicanders improves the best that nature has to offer. Natural materials combined with surprising textures and colors, together with a design that meets even the most avant-garde requirements.



mele


N913004



castagna

N914004



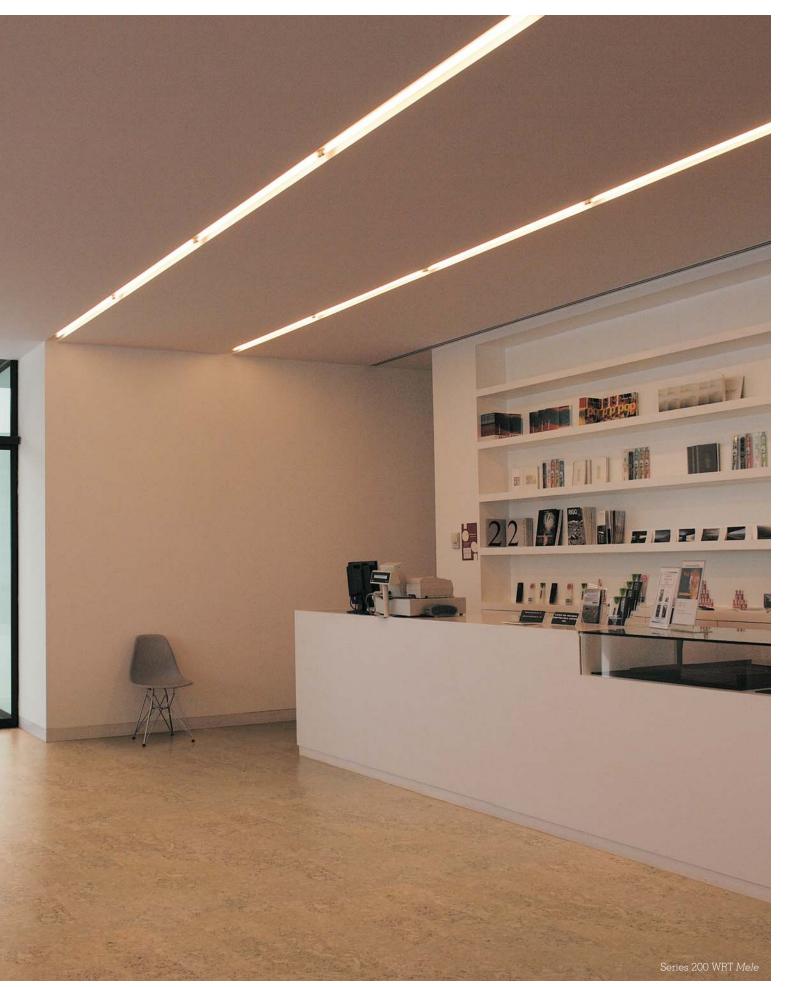

SERIES





If you are looking for a CORKLOC flooring solution that meets the highest durability standards, Series 1000 is the perfect choice. Supplied with a hard wearing surface layer for durability and resilience, this series is ideal for high traffic commercial and public spaces.



FEATURES:

HPS Finish:

A highly durable anti-scratch finish for high traffic areas

CorkLoc Floating Floor System

CorkProtect:

All around edge sealing system used as a moisture barrier

Installation system:

Floating

Dimensions:

nominal: $355/8 \times 1110/16 \times 15/32$ " (905 x 295 x 12mm)

Warranty:

15 Year Commercial

Suitable for:

Hotel Corridors, Offices, Hospital Patient Rooms, Pharmacies, Retail Sales Floors, Computer Labs, Beauty Shops

Approximate installed cost:

\$9.00 - \$12.00 per square foot

LEED qualifying points:


MR Credit 4.1 & 4.2 (45.8% recycled content)

MR Credit 6

IEQ Credit 4.1

ID Credit 1

Note: Series 1000 comes with a factory applied finish and does not require on-site finishing

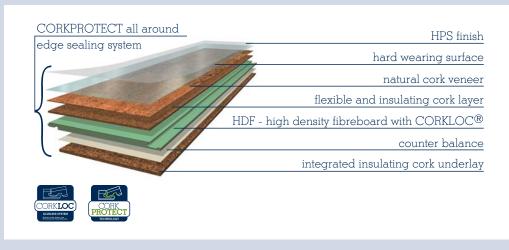

ORIGINALS COLLECTION



The warm and classic look only nature can create, adding an alluring design in any space.



Natural O101001




Harmony O121001



Accent O141001



Dawn 0149002

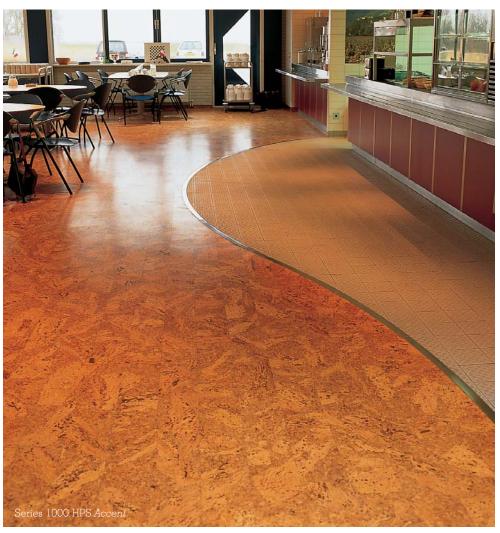

IDENTITY COLLECTION



Offered in a variety of patterns, the rich natural texture of Wicanders Cork Oak adds unique depth and intrigue to any area.







metallic sky II 16002



nightshade I121003



chestnut I132003



NUANCES COLLECTION



Wicanders richly textured Nuances Collection plays on a subtle variance of glowing tones inspired by the warmth of earthen shades.



umbra

N104002



panna

N122002





N123002











Series 2000 offers you the glue-down solution for highest durability requirements. Also supplied with a hard wearing surface layer, it fulfills all your expectations for high traffic commercial and public spaces.



FEATURES:

HPS Finish:

A highly durable anti-scratch finish for high traffic areas

Installation system:

Glue down

Dimensions:

nominal: $24 \times 12 \times 1/8$ " $12 \times 12 \times 1/8$ " $(600 \times 300 \times 3.2$ mm) $(300 \times 300 \times 3.2$ mm)

Warranty:

15 Year Commercial

Suitable for:

Restaurants, Lobbies, Gymnasiums, Locker Rooms, Department Store Sales Floors, Cafeterias


Approximate installed cost:

\$5.00 - \$8.00 per square foot

LEED qualifying points:

MR Credit 4.1 & 4.2 (76.5% recycled content) MR Credit 6 IEQ Credit 4.1 ID Credit 1

Note: Series 2000 comes with a factory applied finish and does not require additional on-site finishing

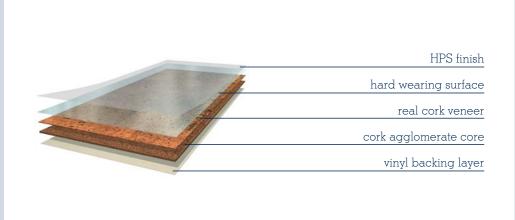

ORIGINALS COLLECTION



Earthly tones create unique character and enhance the warmth nature brings in.



Harmony O221002



Shell 0224002



Rhapsody O225001



Country

0232004



Accent

0241001



IDENTITY COLLECTION



Bold colors and rich textures are our specialty. Whoever thought fashion and functionality could exist side by side?







secrets I219005



nightshade I221006



ruby I230002



NUANCES COLLECTION





Drawn from the shades of the rich Mediterranean earth, Wicanders provides unique design, sustainability and the longest commercial warranty in the industry.



umbra

N204002



panna

N222002



brunello

N223002





International Product Selector

These items may be available by special order. Ask your Wicanders representative for details such as minimum order quantities and lead time

SERIES	5	SERIES 100	SERIES 200					SERIES 1000	Series 1000 Acousticork NRT	SERIES 2000	
Class of use ((EN 685)	31	31	31	31	31	31	33	33	33	33
Finishing	(2000)	Wear Resistance		Sanded	101	Pre-varnished	101	High Performan		High Performan	
Thickness (m	\	10,5	4	4	6	6	6	12	12	3,2	3,2
· · · · · · · · · · · · · · · · · · ·	· ·										
Dimension (m	nm)	905x295	600x300	600x300	600x300	600x300	600x300	905x295	905x295	600x300	300x300
Bevelling		Not Bevelled	Not Bevelled	Not Bevelled	Not Bevelled	Bevelled	Not Bevelled	Not Bevelled	Not Bevelled	Not Bevelled	Not Bevelled
	NALS ECTION	0001007	Divionos	DMI 0001				0101001		0201002	0201000
Natural		O801007	RV10003	RN10001				O101001		O201003	O201002
Traditional			RV01020	RN01008	EN01005	DN01006	DN01005				
Harmony		O821005	RV11007	RN11002		DN11004	DN11003	O121001	O121A03	O221003	O221002
Character		O822002	RV16004	RN16001							
Shell		O824003	RV14004	RN14002		DN10003					
Rhapsody		O825005	RV12007	RN12002		DN12003		O125001			O225001
Symphony		O830003	RV20002			DN20003					
Rustic	· 科人			RN15001							
Country		O832004	RV02012		EN02005	DN02006					
Accent		O841002	O941001	RN17001		DN17003	DN17002	O141001		O241003	
Dawn		O849003	RV13006			DN13003	DN13001				
Prestige		O840001	O940001								

SERIES	SERIES 100	SERIES 200
Class of use (EN 685)	31	31
Finishing	Wear Resistance	Technology
Thickness (mm)	10,5	4
Dimension (mm)	905x295	600x300
Bevelling	Not Bevelled	Not Bevelled
PRESIDENT COLLECTION		
moonlight	F801002	F901001
timide	F802002	F902001
silver	F803001	F903002
champagne	F805001	F905001

PRESIDENT COLLECTION	ON	
moonlight	F801002	F901001
timide	F802002	F902001
silver	F803001	F903002
champagne	F805001	F905001
eden	F806001	F906002
nightshade	F821002	F921002
chestnut	F832001	F932002
peach	F835001	F935002

SERIES	SERIES 100	SERIES 200		SERIES 1000	SERIES 2000
Class of use (EN 685)	31	31	31	33	33
Finishing	Wear Resistance		Pre-vamished	High Performance	L
Thickness (mm)	10,5	4	6	12	3,2
			-	905x295	600x300
Dimension (mm)	905x295	600x300	600x300		
Bevelling	Not Bevelled	Not Bevelled	Bevelled	Not Bevelled	Not Bevelled
PERSONALITY COLLECTION					
moonlight	P801002	P901007	P901003	P101003	P201005
timide	P802002	P902007	P902003	P102003	P202004
silver	P803002	P903006	P903003		
champagne	P805002	P905007	P905003	P105003	P205004
eden	P806002	P906005	P906003	P106002	P206004
spice	P808002	P908006	P908003		
tea	P810002	P910004	P910003		
cool crimson	P814002	P914004	P914003		
secrets	P819002	P919004	P919003		
nightshade	P821002	P921005	P921003		
chestnut	P832002				
caramel	P833002				

International Product Selector

SERIES	SERIES 100	SERIES 200					SERIES 1000	Series 1000 Acousticork NRT	SERIES 2000	
Class of use (EN 685)	31	31	31	31	31	31	33	33	33	33
Finishing	Wear Resistance	_	Sanded		Pre-varnished		High Performan		High Performan	
Thickness (mm)	10,5	4	4	6	6	6	12	12	3,2	3,2
Dimension (mm)	905x295	600x300	600x300	600x300	600x300	600x300	905x295	905x295	600x300	300x300
Bevelling	Not Bevelled	Not Bevelled	Not Bevelled	Not Bevelled	Bevelled	Not Bevelled	Not Bevelled	Not Bevelled	Not Bevelled	Not Bevelled
IDENTITY COLLECTION										
moonlight	I801002	1901007			1901002		1101003		1201007	1201006
timide	I802002	1902007			1902002		1102003	1102A02	1202007	1202006
silver	1803002	1903007			1903002		1103003	1103A02	1203006	
champagne	I805002	1905007			1905002		1105003	I105A02	1205007	1205006
eden	1806002	1906005			1906002		1106002		1206005	
spice	I808002	1908007			1908002		1108003	1108A02	I208006	
tea	I810002	I910005			1910002		1110002		I210003	
cool crimson	1814002	1914006			1914002		I114002		1214005	
secrets	I819002	I919005			1919002		1119002	I119A02	1219004	
nightshade	I821002	I921006			I921002		1121003		1221007	I221006
chestnut	I832002							I132A02		
caramel	1833002									

International Product Selector


SERIES	SERIES 100	SERIES 200					SERIES 1000	Series 1000 Acousticork NRT	SERIES 2000	
Class of use (EN 685)	31	31	31	31	31	31	33	33	33	33
Finishing	Wear Resistanc	e Technology	Sanded		Pre-varnished		High Performan	ice Surface	High Performar	ce Surface
Thickness (mm)	10,5	4	4	6	6	6	12	12	3,2	3,2
Dimension (mm)	905x295	600x300	600x300	600x300	600x300	600x300	905x295	905x295	600x300	300x300
Bevelling	Not Bevelled	Not Bevelled	Not Bevelled	Not Bevelled	Bevelled	Not Bevelled	Not Bevelled	Not Bevelled	Not Bevelled	Not Bevelle
NUANCES COLLECTIO										
avorio	N801001	N901003			N901002		N101002	N101A02	N201002	
cotone	N802001	N902003			N902002		N102002	N102A02	N202002	
canelle	N803001	N903003			N903002		N103002	N103A02	N203002	
umbra	N804001	N904003			N904002		N104002	N104A02	N204002	
latte	N812001	N912004			N912002		N112003	N112A02	N212003	
Orzo	N811001	N911004			N911002		N111003	N111A02	N211003	
mele	N813001	N913004			N913002		N113003	N113A02	N213003	
castagna	N814001	N914004			N914002		N114003	N114A02	N214003	
frumento	N821001	N921003			N921002		N121002	N121A02	N221002	
panna	N822001	N922003			N922002		N122002	N122A02	N222002	
patina	N824001	N924003			N924002		N124002	N124A02	N224002	
brunello	N823001	N923003			N923002		N123002	N123A02	N223002	

Recommended Applications

	Glue	e Down	Floating		
	Xtreme WRT	Hard Wearing	Vinyl with HPS		
	SERIES 200	SERIES 2000	SERIES 1000		
Hospitality					
Corridors	R	Н	Н		
Guest Rooms	Н	Н	Н		
Stage / Dance Floor	N	R	R		
Dining Areas	R	R	R		
Elevators	N	R	N		
Entryways	N	N	N		
Lobbies	N	N	N		
Lounges	R	R	R		
Conference Rooms	Н	Н	Н		
Vending Areas	N	R	R		
Healthcare					
Lobbies	N	Н	Н		
Exam Rooms	R	Н	Н		
Hallways	R	Н	Н		
Offices	R	Н	Н		
Patient Rooms	R	Н	Н		
Pharmacies	R	H	H		
Physical Therapy Rooms	R	Н	Н		
Education					
Cafeterias / Dining Āreas	R	R	R		
Classrooms	Н	Н	Н		
Computer Rooms	Н	Н	Н		
Hallways	Н	Н	Н		
Dormitories	Н	Н	Н		
Libraries	Н	Н	Н		
Multipurpose Rooms	Н	Н	Н		
Retail					
Specialty Shops	R	Н	Н		
Sales Floor - Department Stores	R	Н	Н		
Indoor Mall Common Areas	N	N	N		
Sales Floor - Mass Merchant	R	Н	Н		
Drug Store	N	Н	R		
Office / Corporate					
Hallway / Corridor	R	Н	Н		
Conference Rooms	Н	Н	Н		
Elevators	N	Н	R		
Lobbies	N	Н	Н		
Offices	Н	Н	Н		
Computer Rooms	Н	Н	Н		
Lunch Rooms	R	R	R		
Institutional					
Courthouses	Н	Н	Н		
Museums	R	Н	Н		
Libraries	Н	Н	Н		
Prisons	N	R	R		
Churches	Н	R	R		
Funeral Houses	R	Н	Н		

- H HIGHLY RECOMMENDED
- R RECOMMENDED
- N NOT RECOMMENDED



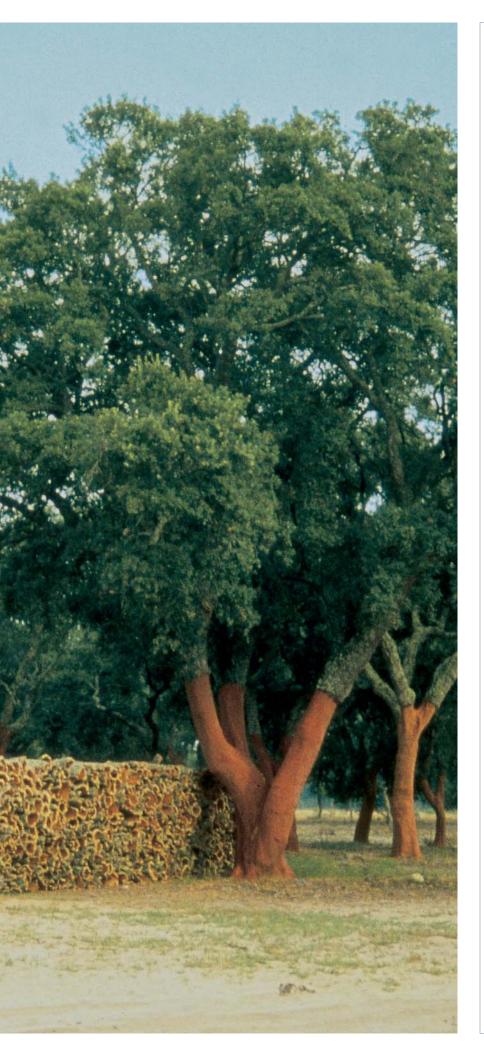

Cork flooring LEED credits

Recycled Content:

MR Credit 4.1:

10% (post-consumer + $\frac{1}{2}$ pre-consumer) MR Credit 4.2:

20% (post-consumer + ½ pre-consumer) Wicanders Cork Flooring is made from the waste of the cork wine stopper industry, hence containing post-industrial/pre-consumer waste. The percentage of recycled content depends on the product line. Series 200 contains 100%, Series 1000 contains 45.8% and Series 2000 contains 76.5% recycled content.

MR Credit 6:

Rapidly Renewable Materials

Wicanders Cork Flooring is made of the bark from the cork oak tree. The bark is harvested every 9 years and the bark regrows. The tree is never harmed or felled.

IEQ Credit 4.1:

Low-Emitting Materials:

Adhesives and Sealants

The adhesives used in our glue-down products have low VOCs and are compliant to the EC1 European standard

In addition, Wicanders Cork Flooring is being produced with the new Acrodur® binder from BASF, which makes the cork in all of our products 100% formaldehyde free.

ID Credit 1-1.4:

Innovation in Design

The natural properties of cork - thermal insulation, resilience, comfort, molecular structure, sound absorbance - make this choice of flooring innovative in design.



Specifications

		Laying method	Floating	Glue	e down
		Finishing	High Performance Surface	Xtreme WRT	High Performance Surface
Test	Standard	Unit	Series 1000	Series 200	Series 2000
Level of use					
Commercial	EN685	class	33	31	33
General properties					
Dimensions	EN 427/EN 428	mm inches	905x295x12 35-5/8x11-10/16x15/32	600x300x4 24x12x5/32	300x300x3.2 · 600x300x3.2 12x12x1/8 · 24x12x1/8
Wear layer thickness	EN 429	mm	0.5		0.5
Safety specifications					
Critical radiant flux	ASTM E 648-3	Watts/Cm ²	0.83		0.40
Specific optical density	ASTM E 662-03	Density	Flaming: 393.8 Non flaming: 438.3	Flaming: 145.8 Non flaming: 287.4	Flaming: 279.3 Non flaming: 386.4
Static coefficient friction	ASTM C1028-89	Coeff.	Dry: 0.69; Wet: 0.94	Dry: 0.65; Wet: 0.69	Dry: 0.76; Wet: 0.92
Surface flammability	ASTM D2859	Pass/fail	Passes	Passes	Passes
Sound specifications					
STC sound transmission class	ASTM E413-87	dB	54	53	53
IIC Impact insulation class	ASTM E492-04	dB	59	56	53
Thermal specifications					
Thermal resistance	ASTM C-518-04	(R-value)	0.57	0.29	0.16
Mechanical specifications					
Wear resistance	ASTM D3884	Nr. of Cycles Wheigt loss	7300 0.00069	475 0.189	6800 0.00147
Chemical resistance	ASTM F925-97	Sulf. dulling Sulf. attack Color change	Rate O (a) No change No change	Rate O (a) 	Rate O (a) No change No change

(a) Rate 0 = no observed effect. The following products were tested: 5% acetic acid vinegar; 70% isopropyl alcohol, Mineral oil, NaOH Sodium oxide, 5% HCI Hydrochloric acid, 5% H2SO4 Sulfuric acid, 5% NaOCI Household ammonia, 5% Phenol desinfectant, Kerosene, Olive oil, Unleaded gasoline

Technical data subject to change

WARRANTY

EXTENDED STRUCTURAL AND WEAR WARRANTY

We warrant, that our flooring products, when supplied as new and through approved outlets, shall be free of defects in lamination, assembly, milling, dimension and grading, and that the Surface Wear Layer will not wear through within the periods, after invoice date, indicated in the table above. The term "wear through" is defined as the 100% reduction of the Surface Wear Layer over an area comprising 5% of the total Surface Flooring installed.

IMPORTANT: The Wicanders Warranty is valid if the Wicanders Installation and Maintenance instructions that are in the flooring packaging, in the auxiliary products (adhesives, maintenance & cleaning products, etc.) packaging and in the website www.wicanders.com are respected. In case of any doubts contact us at: marketing.ar@amorim.com

EXTENDED WARRANTY COVERAGE

If in the unlikely event our products do not perform according to the applicable warranty, we will, at our option, repair, refinish or replace such portion, with the same product or another product of equal value (at our selection), or refund the price paid - if replacement or repair cannot be made in a timely manner.

- A) During the first three (3) years of this warranty we assume liability of removal of defective products and installation of replacement products, AT NO COST TO YOU. After this period (when applicable), we shall only provide the flooring products for replacement, according to the lifetime usage table below.
- B) The value of each m^2 of replacing flooring is: Period (years): Coverage:

3-10 100% 11-20 50% 21-25 25%

MAINTENANCE

REGULAR MAINTENANCE

HIGH PERFORMANCE SURFACE (Series 1000, 2000) and WRT (Series 100, 200)

- Vacuum or sweep the floor to remove any loose grit and debris, using a soft, clean brush.
- •Mop your floors with a high quality sponge mop, keeping the mop moist rather than wet. Use only clean water, nothing else is needed. Periodically, use Wicanders Soft Cleaner or Xtreme Natural Cleaner (for Xtreme WRT flors) following instructions on the label. Wring out the sponge mop vigorously. Mop in the direction of the grain. If you see water on your floor, your sponge is probably too wet.
- Allow the floor to dry completely
- •Do not use any oils or waxes on dust mop
- •Use a sponge mop dampened slightly with water or Wicanders recommended cleaner (Wicanders Soft Cleaner or Xtreme Natural Cleaner for Xtreme WRT floors), on a regular basis, to remove any kind of soil and grit. The frequency of cleaning depends on the amount of traffic (daily weekly)
- •Never use anything other than water or Wicanders recommend cleaner on your Wicanders floor coated with Xtreme WRT or HPS finish.
- •You may want to press the mop into a dry towel to remove excess moisture. For heavily soiled floors, use Wicanders recommended cleaners only. (Wicanders Soft Cleaner or Xtreme Natural Cleaner for Xtreme WRT floors).

TIPS TO KEEPING YOUR FLOOR LOOKING GREAT

- •Use doormats at all entrances to remove dirt and grit carried on footwear
- •Clean up spills and spots immediately
- •Use felt pads on chair and furniture legs and replace them as they wear out
- Furniture castors should have a width proportional to the supported weight
- •Use protective office mats under rolling chairs
- If works will take place in the room where the floor is installed, protect with craft paper, plywood or hardboard
- Cork, as a natural material may tend to fade when exposed to sunlight. Use blinds, curtains or other sun screening system to minimize this effect
- Avoid excessive moisture on the floor.
- \bullet Ideal and healthy room conditions are 35 65% relative humidity at 68°F (20°C).

ON ALL SURFACES, NEVER:

- •Use latex or rubber backed mats as they can permanently stain the floor.
- Use cleaning products with abrasive ingredients or solvent-based ingredients, e.g. acetone
- •Use wire brushes
- Drag furniture across the floor
- Use a wet mop or pour water directly on the floor
- •Use wax, polish, or abrasive cleaners, steel wool or scouring powder







Amorim Flooring North America

Hanover, MD 21076 · USA Tel: 410 553 6062 (6063 / 6064) Fax: 410 553 6123 e-mail: info.ar.us@amorim.com

www.wicanders.com